### **AC 56**

# Scotsman

### Self Contained Ice Machine up to 35 kg

Item #:	
Project:	
Quantity:	



#### **FEATURES**

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front panel mount ON-OFF switch.
- Ergonomically designed ice storage access, with disappearing
- Door-closing movement dampening system.



AC L 56 Large Gourmet 39 g Ø 38 x H 41 mm



AC M 56 Medium Gourmet 20 g Ø 30 x H 34 mm



Small Gourmet 8 g Ø 21 x H 25 mm

CONDENSING SYSTEM	INTERNAL BIN CAPACITY				
Air cooled Water cooled	12 kg				
REFRIGERANT GAS	OPERATING REQUIREMENTS				
R134a		Minimum	Maximum		
	Air temperature	10°C	43°C		
VOLTAGE V/Hz/ph	Water temperature	5°C	38°C		
230/50/1	Water pressure	1 bar (14 psi)	5 bar (70 psi)		
230/60/1	Electrical voltage	-10%	+10%		

#### Certifications:


















## **AC 56**

## **Scotsman**° Ice Systems

### Self Contained Ice Machine up to 35 kg

Item #:
Project:
Quantity:

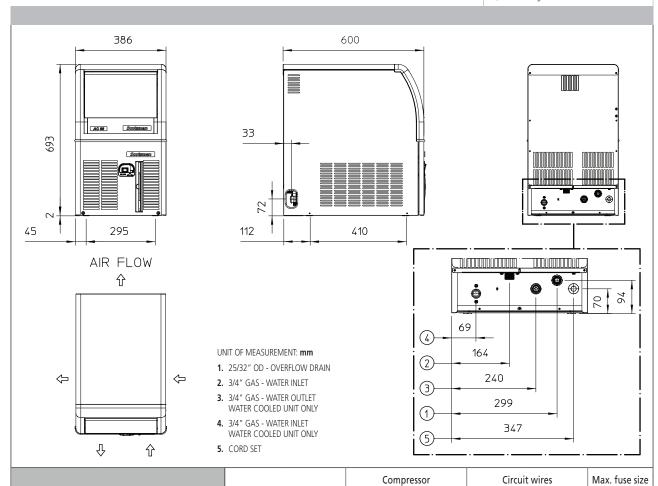

					<u>'</u>				
UNIT DATA			Version	Voltage	Btu/h	W	No.	Ømm²	Α
Size (W x D x H)	386 x 600 x 695	mm	AC L 56 AS	230/50/1	2730	800	3	1.5	10
Net weight	36 kg	AC L 56 WS	230/50/1	2730	800	3	1.5	10	
		AC M 56 AS	230/50/1	2730	800	3	1.5	10	
SHIPPING DATA		AC M 56 WS	230/50/1	2730	800	3	1.5	10	
Carton (W x D x H) 460 x 670 x 810 mm			AC S 56 AS	230/50/1	2730	800	3	1.5	10
Weight 43 kg			AC S 56 WS	230/50/1	2730	800	3	1.5	10
		AC M 56 AS	230/60/1	3071	900	3	1.5	10	
			AC M 56 WS	230/60/1 1 ice production	3071 n ka	900 Ene	ergy 3	Water	Instant
			°C Amb. / °C Water		•	consumption*		usage*	power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	w
AC L 56 AS	Air	230/50/1	31	30	23	33.1	7.6	4.2	400
AC L 56 WS	Water	230/50/1	31	30	23	33.1	7.6		400
AC M 56 AS	Air	230/50/1	32	31	24	33.0	7.9	3.8	400
AC M 56 WS	Water	230/50/1	33	31	27	26.0	7.0	20.2	400
AC S 56 AS	Air	230/50/1	25	24	19	38.6	7.1	3.1	400
AC S 56 WS	Water	230/50/1	25	24	19	38.6	7.1		400
AC M 56 AS	Air	230/60/1	35	34	27	32.3	8.6	4.4	470

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions