

EC 176 EASY FIT

Self Contained Ice Machine up to 85 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Advanced diagnostics Computerized control.
- Front panel in&out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC L 176
Large Gourmet 39 g
Ø 38 x H 41 mm



EC M 176
Medium Gourmet 20 g
Ø 30 x H 34 mm



EC S 176
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

41 kg

REFRIGERANT GAS

R134a
R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine up to 85 kg

EC 176 EASY FIT

Self Contained Ice Machine up to 85 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 85 kg

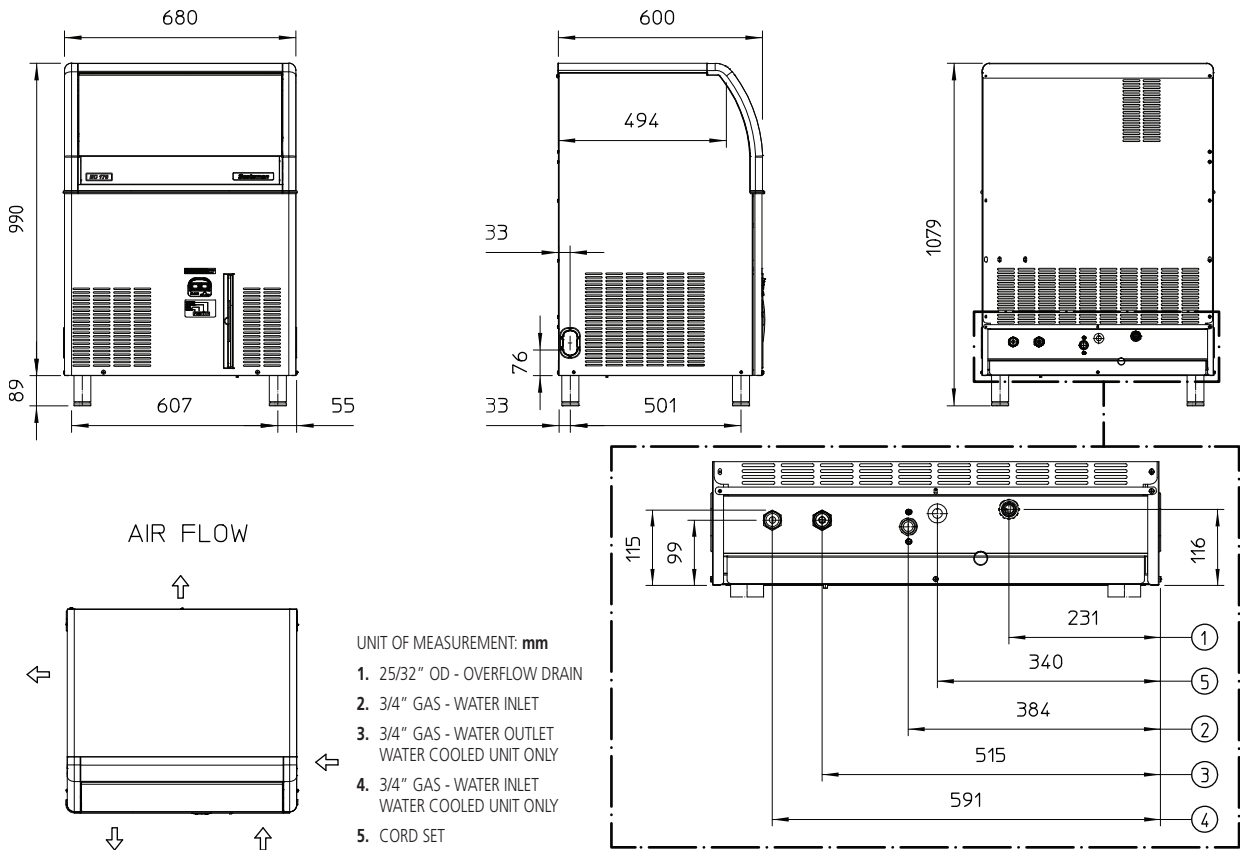

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	680 x 600 x 1080 mm		EC L 176 AS	230/50/1	5132	1504	3	1.5	16
Net weight	72 kg		EC M 176 AS	230/50/1	2491	730	3	1.5	16
SHIPPING DATA			EC M 176 WS	230/50/1	5118	1500	3	1.5	16
			EC S 176 AS	230/50/1	5118	1500	3	1.5	16
Carton (W x D x H)	750 x 670 x 1170 mm								
Weight	82 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EC L 176 AS	Air	230/50/1	71	70	58	25.9	15.0	7.9	860
EC M 176 AS	Air	230/50/1	85	83	65	25.7	16.7	7.1	900
EC M 176 WS	Water	230/50/1	85	80	68	20.6	14.0	79.2	610
EC S 176 AS	Air	230/50/1	70	69	55	29.1	16.0	9.6	900

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions