MXG 428 EXTREME


Modular Ice Machine up to 195 kg



ltem #:
Project:
Quantity:

	Scotsman MXG 428 IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	 FEATURES Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition. Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference. Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors. Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same. External indicator lights: keeps ice maker's operations under constant surveillance. Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer. 							
		CONDENSING		RECOMME		S			
67		SYSTEM	Head	Head Bins		kg			
6 / 000	MXG L 428	Air cooled		~	SB193	129			
R. D	Large Gourmet 39 g Ø 38 x H 41 mm	Water cooled		~	SB322	168			
This	0.50 ×11 +1 1111			BINTOPMKGSB55	SB550	252			
		REFRIGERANT GAS R404A	MXG 428	•	UBH1100	553			
				•	UBH1600	812			
	MXG M 428 Medium Gourmet 20 g			•	SIS700	318 + 73			
	Ø 30 x H 34 mm			•	SIS1350	613 + 73 + 73			
	MXG S 428 Small Gourmet 8 g Ø 21 x H 25 mm	VOLTAGE V/Hz/ph 230/50/1 230/60/1	 ✓ : Perfec ● : Ice chu 	LEGENDA: ✓ : Perfect combination between ice maker and bin ● : Ice chute cut-out performed upon installation CBTxxxxxxxxx : need additional bin top					
Certifications:		OPERATING REQUIREMENTS							
			Mir	Minimum		Maximum			
(e) C ∈ FHI	💓 🖄 🙆	Air temperature	1	10°C		43°C			
agion (LOA)		Water temperature		5°C 38°C		38°C			
		Water pressure	1 ba	1 bar (14 psi) 5 bar ((70 psi)			
		Electrical voltage	-	-10%		+10%			
This spec sheet is meant	rre subject to change without notice. for commercial purpose only. For Jease refer to our service manuals.	Download our free App Sco Apple store Google play Windows store	tsman Ice	www.scotsma www.scotsma					

17 October 2017

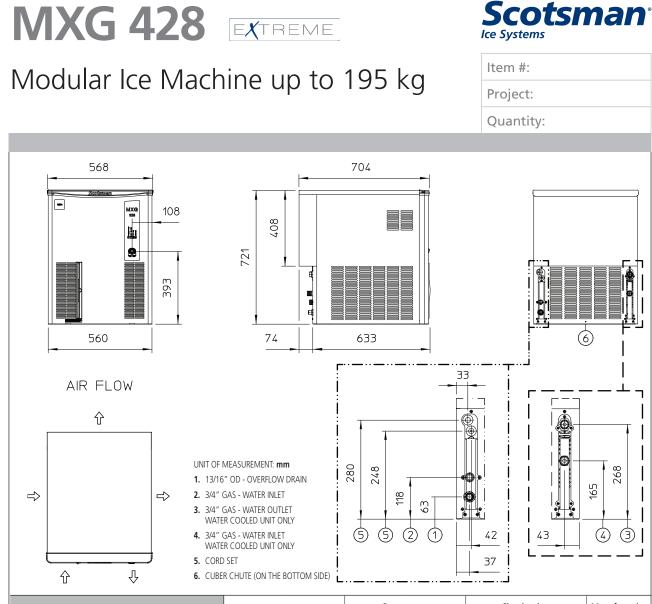

					Compressor		Circuit wires		Max. fuse size
UNIT DATA			Version	Voltage	Btu/h	w	No.	Ømm ²	A
Size (W x D x H)	568 x 704 x 721	mm	MXG L 428 AS	230/50/1	17163	5030	3	1.5	16
Net weight	66 kg		MXG L 428 WS	230/50/1	17163	5030	3	1.5	16
			MXG M 428 AS	230/50/1	17163	5030	3	1.5	16
SHIPPING DATA	MXG M 428 WS	230/50/1	17163	5030	3	1.5	16		
Carton (W x D x H)	V x D x H) 630 x 770 x 910 mm			230/50/1	17163	5030	3	1.5	16
Weight	77 kg		MXG S 428 WS	230/50/1	17163	5030	3	1.5	16
3	ÿ		MXG M 428 AS	230/60/1	20207	5922	3	1.5	16
			24 h	n ice production	on kg Ene		ergy	Water usage*	Instant
			°C	Amb. / °C Wat	er	consumption*			power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
MXG L 428 AS	Air	230/50/1	167	167	130	26.5	34.5	13.8	1750
MXG L 428 WS	Water	230/50/1	172	170	147	20.4	30.0	106.3	1400
MXG M 428 AS	Air	230/50/1	190	180	128	28.7	36.7	15.4	1850
MXG M 428 WS	Water	230/50/1	195	190	165	19.5	32.2	150.0	1400
MXG S 428 AS	Air	230/50/1	195	182	135	28.9	39.0	20.8	2000
MXG \$ 428 WS	Water	230/50/1	195	192	170	20.0	34.0	185.4	1400
MXG M 428 AS	Air	230/60/1	180	169	128	32.0	41.0	16.3	2000
(*) Data refer to 32°C Amb.	/ 21°C Water temperatur	e conditions							