

NW 1408



Modular Ice Machine up to 680 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW L 1408
Large Cube 17 g
W 29 x D 24 x H 29 mm



NW 1408
Full Cube 12 g
W 26,5 x D 26,5 x H 26 mm



NW H 1408
Half Cube 6 g
W 13 x D 26,5 x H 26 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

380/50/3

RECOMMENDED BINS

Head	Bins		kg
NW 1408	✓	SB530	243
	CBT48EAMCD	SB948	406
	CBT52EAMCD	SB1025	478
	●	UBH1100	553
	●	UBH1600	812

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 680 kg


NW 1408



Modular Ice Machine up to 680 kg

Item #:
Project:
Quantity:

Modular Ice Machine up to 680 kg

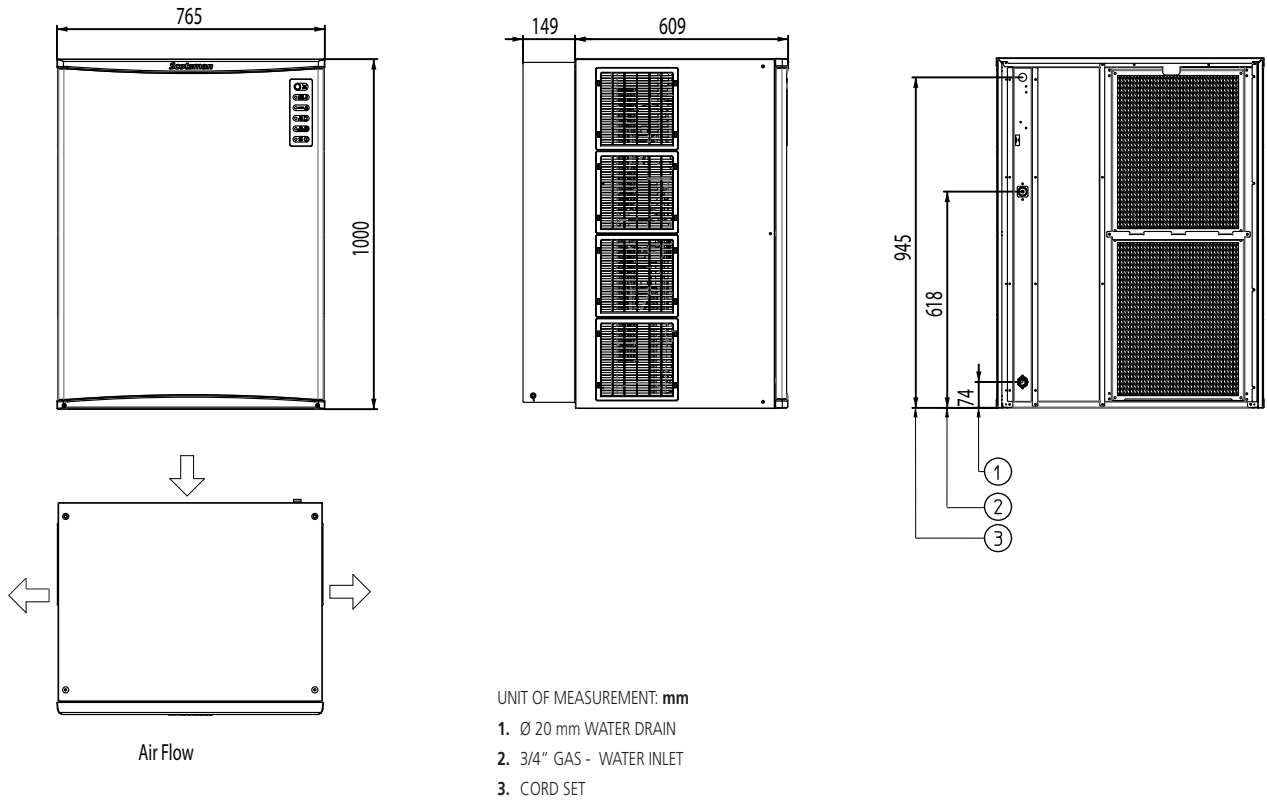

UNIT DATA				Compressor		Circuit wires		Max. fuse size		
		Version	Voltage	Btu/h	W	No.	Ømm ²	A		
Size (W x D x H)	765 x 610 x 1000 mm	NW 1408 AS	380/50/3	31733	9300	5	2.5	15		
Net weight	130 kg	NW 1408 WS	380/50/3	31733	9300	5	2.5	15		
SHIPPING DATA		NW H 1408 AS	380/50/3	31733	9300	5	2.5	15		
		NW H 1408 WS	380/50/3	31733	9300	5	2.5	15		
		NW L 1408 AS	380/50/3	31733	9300	5	2.5	15		
		NW L 1408 WS	380/50/3	31733	9300	5	2.5	15		
		Carton (W x D x H)	830 x 690 x 1160 mm							
		Weight	145 kg							

Version	Condensation	Voltage	24 h ice production kg			Energy consumption*		Water usage*	Instant power
			°C Amb. / °C Water			kWh/100 kg	kWh/24h		
NW 1408 AS	Air	380/50/3	10°C/10°C	21°C/10°C	32°C/21°C	13.0	68.0	29.5	3500
NW 1408 WS	Water	380/50/3		600	540	13.0	68.0	280.3	3500
NW H 1408 AS	Air	380/50/3	680	650	530	11.4	60.8	31.0	3500
NW H 1408 WS	Water	380/50/3		620	550	11.4	60.8	210.2	3500
NW L 1408 AS	Air	380/50/3	620	614	470	13.3	64.0	24.4	3500
NW L 1408 WS	Water	380/50/3		580	490	13.3	64.0	219.7	3500

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions