

NW 308



Modular Ice Machine up to 160 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 308
Full Cube 12 g
W 26,5 x D 26,5 x H 26 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
NW 308	✓	SB193	129
	✓	SB322	168
	CBT30EMCD	SB393	181
	CBT30EMCD	SB530	243

LEGENDA:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 160 kg


NW 308



Modular Ice Machine up to 160 kg

Item #:
Project:
Quantity:

Modular Ice Machine up to 160 kg

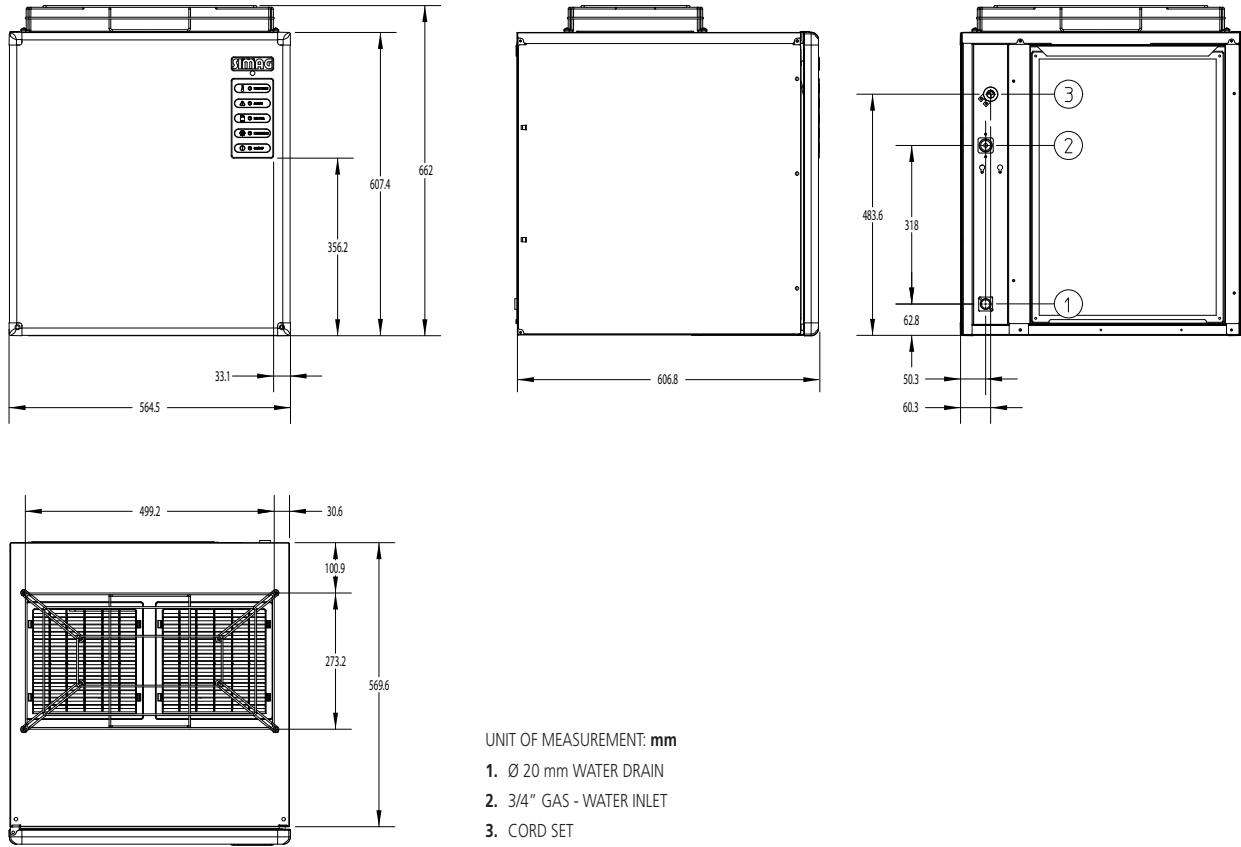

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	558 x 610 x 609 mm		NW L 308 AS	230/50/1	6142	1800	3	1.5	10
Net weight	54 kg								
SHIPPING DATA									
			Carton (W x D x H)	620 x 680 x 800 mm					
Weight	63 kg								
			24 h ice production kg			Energy consumption*		Water usage*	Instant power
			°C Amb. / °C Water						
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW L 308 AS	Air	230/50/1	160	140	105	34.9	16.2	6.8	800

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions