iceValet[®]



HD30 - 30" Hotel Dispenser iceValet[®] Hotel Dispenser

Features

- Stores up to 180 lb. of cube ice.
- Simple push chute for easy ice dispensing.
- Modern, stylish design in a corrosion resistant metallic cabinet.
- Removable top panel allows access to the bin for easy cleaning without having to remove the ice machine.
- Improved sink depth that will accommodate almost every size hotel ice bucket.
- Equipped with an 11 ft. power cord.
- Match the iceValet[®] dispenser with a Scotsman Prodigy Plus[®] ice machine featuring self-monitoring technology, cost-saving energy efficiency, extended time between cleanings, easy-access servicing and built-in anti-microbial protection. All of these features add up to the smartest choice in ice.

Easy Push Chute



Storage Capacity
HD30
AHRI Bin Capacity
180/81 Ib/kg



Foam insulation is forced between the wall and liner under heat and pressure to form a perfect wall to wall bond, preserving ice supply for long periods.

Scotsman[®]

Matching Ice Machine Options

			24 Hr Ice Production			
Model Number	Cube Size	Condenser Type	70°F/21°C 50°F/10°C lb/kg	Air 90°F/32°C Water 70°F/21°C Ib/kg		
C0330MA	Medium	Air	350/159	300/136		
C0330MW	Medium	Water	400/182	300/136		
C0330SA	Small	Air	350/159	300/136		
C0330SW	Small	Water	400/182	300/136		
C0530MA	Medium	Air	525/238	380/172		
C0530MW	Medium	Water	500/227	410/186		
C0530SA	Small	Air	525/238	380/172		
C0530SW	Small	Water	500/227	410/186		






- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.

• 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •

• 1-800-SCOTSMAN • Fax: 847-913-9844 • www.scotsman-ice.com • customer.relations@scotsman-ice.com •

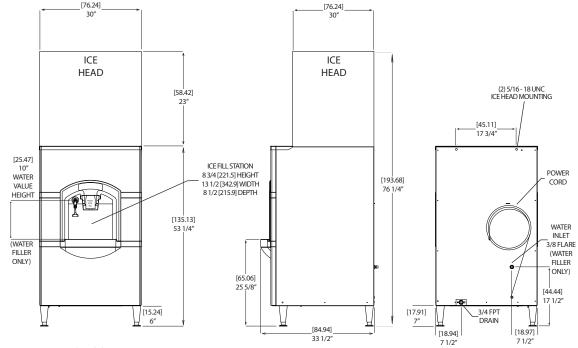


Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.

C0330 on HD30 hotel dispenser.

Specifications

Model Number	Actuation	AHRI Bin Capacity lb/kg	Electrical	Circuit Wires	Min. Circuit Ampacity	Max. Fuse Size or HACR Circuit Breaker (amps)
HD30B-1	Push	180/81	115/60/1	2	2.1	15
HD30W-1*	Push	180/81	115/60/1	2	2.1	15

*Unit comes with a water spout next to ice chute



Operating Requirements				
	Minimum	Maximum		
Air Temperatures	50°F (10°C)	100°F (38°C)		
Water Temperatures	40°F (4.4°C)	100°F (38°C)		
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)		
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)		
Electrical Voltage	-5%	+10%		

Specifications and design are subject to change without notice.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

